


PATH TO THE FUTURE

Wir präsentieren den MSI MPG 321URXWDE QD-OLED esports Gaming Monitor. Dieser hochmoderne Monitor verfügt über ein 32-Zoll-UHD-Display mit einer blitzschnellen Bildwiederholfrequenz von 240 Hz und einer Reaktionszeit von 0,03 ms. Der MPG 321URXWDE QD-OLED gibt Ihnen den Wettbewerbsvorteil, den Sie brauchen, um Ihre Gegner in Gaming-Battles zu besiegen.



SELLING POINTS

- Neueste Gen QD-OLED-Panel – mit atemberaubender Bildqualität und schneller Reaktionszeit.
- Schnellste 0,03 ms GtG-Reaktionszeit und 240 Hz Bildwiederholfrequenz.
- QD Premium Color – Farbgenauigkeit – Delta E≤2.
- Unglaubliche HDR-Darstellung – VESA DisplayHDR True Black 400.
- MSI OLED Care 2.0 – Reduziert das Risiko von OLED-Bildfestsetzung/Einbrennen.
- Konsolenmodus – Bietet HDMI™ 2.1 (UHD@240Hz) mit einer vollen Bandbreite von 48 Gbps.
- 3-jährige Einbrenn-Garantie – Einschließlich Abdeckung für OLED-Einbrennen.

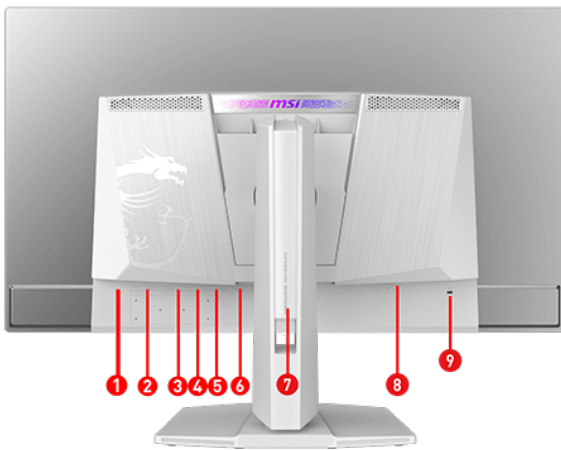

1. Kopfhörerausgang
2. 2 x HDMI™ (2.1)
3. Display Port (1.4a)
4. USB Typ-C (PD 90W)
5. USB 2.0 Typ-B
6. 2 x USB 2.0 Typ-A
7. 5-Wege Joystick Navigation
8. Stromanschluss
9. Kensington lock

SPECIFICATION

Model	SKU Number	9S6-3DD29A-023
	Entity MKT Name	MPG 321URXWDE QD-OLED
	Part No	9S6-3DD29A-023
	Color	ID1/White-White
Display	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	699.48(H) x 394.73(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.1814(H)x0.1814(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	FreeSync Premium Pro
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	104.88~565.44 KHz(H) / 48~240.39 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120%,93%
	NTSC (CIE1931 area percentage/overlap)	103%,91%
	sRGB (CIE1976 area percentage/overlap)	138%,100%
	sRGB (CIE1931 area percentage/overlap)	146%,100%
	Adobe RGB (CIE1976 area percentage/overlap)	118%,97%
	Adobe RGB (CIE1931 area percentage/overlap)	108%,94%
	DCI-P3 (CIE1976 area percentage/overlap)	110%,99%
	DCI-P3 (CIE1931 area percentage/overlap)	107%,98%
	Rec.709 (CIE1976 area percentage/overlap)	138%,100%
	Rec.709 (CIE1931 area percentage/overlap)	146%,100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%,80%
Rec.2020 (CIE1931 area percentage/overlap)	77%,77%	
Surface Treatment	Anti-Reflection	
Display Colors	1.07B	
Color bit	10 bits	
Schnittstellen	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
	Garantie	Warranty
Power	Power Type	Power Cable
	Power Input	110~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	44
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
Power Cord Type	C13	

Zubehör	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	N/A
	USB Type A to Type B Cable	N/A
	USB Type C to Type A Cable	N/A
	USB Type C to Type C Cable	N/A
	Thunderbolt Cable	N/A
	VGA Cable	N/A
	3.5mm audio Cable	N/A
	3.5mm combo audio Cable	N/A
	3.5mm Mic Cable	N/A
	Power Cord	1
	AC Adaptor	N/A
	Quick Guide	1
	Warranty Card	N/A
Mouse Bungee Unit	N/A	
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	718 x 242 x 483
	Product Dimension without Stand (WxDxH) (mm)	718 x 69 x 418
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	9.6
	Weight Without Stand (kg)	6.7
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	97.5 x 18.5 x 51.5
	Outer Carton Dimension (WxDxH) (cm)	99.5 x 19.5 x 54
	Weight (Gross kg)	12.3
Barcode Info	EAN	4711377266604