

BPSE72V40ART2U-B

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . Automatic Detection of Extended Battery Module Connector
- 3 . Input Connector
- 4 . Output Connector

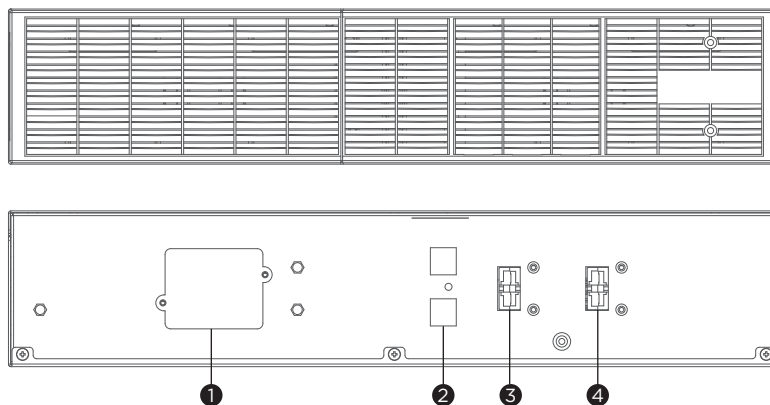

BPSE72V40ART2U-B



TECHNICAL SPECIFICATIONS

Model Name	BPSE72V40ART2U-B
General	
Nominal Output Voltage (Vdc)	72
Rated Output Current (A)	40
Battery	
Battery Type	Sealed Lead-acid
Built-in Charger	No
Typical Recharge Time (Hours)	Depends on Connected UPS
User-replaceable	Yes
Expansion Ready	Yes
Replacement Battery Pack	RBP0158
Replacement Battery Pack Quantity (pcs)	2
Compatible UPS	OLS2200ERT2UA-B, OLS3000ERT2UA, OLS3000ERT2UA-B, OLS3000ERT2UA-N, OLS3000ERT2UA-S
Physical	
Form Factor	Rackmount, Tower
Physical Size	
Dimensions (WxHxD) (mm.)	438 x 88 x 610
Weight (kg.)	38.75
Installed Rack Height (U)	2
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Certifications	
Certifications*	CE
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

