


Cat.6a 500 MHz RJ45 Modul, 10GBit

Art.-Nr. E-20070

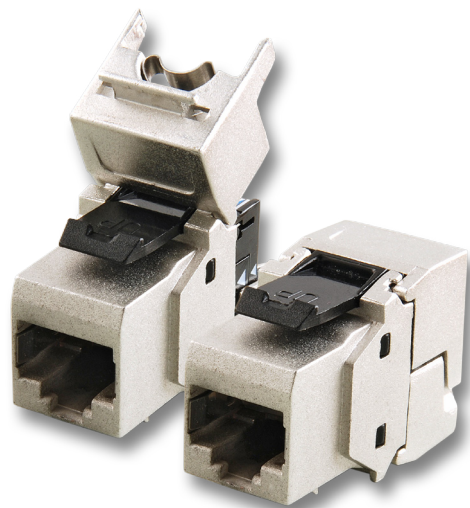

Produkt Details:

- Geschirmter 10GBase-T, Class E_A Keystone Jack

Freigaben:

- Geschirmter 10GBase-T Permanent Link Class E_A by GHMT
- Geschirmter 10GBase-T Channel Class E_A by GHMT
- Geltende Normen:

TIA/EIA-568-B.2-10

TIA/EIA-568-C.2 (2009-08)

ISO/IEC 11801 Amendment 1: 2008-04

2nd FPDAM 2 to ISO/IEC 11801 AMD2 (2009-04)

IEC 60603-7-51

Elektrische Eigenschaften:

- Isolationswiderstand: > 500 MΩ
- Prüfspannung Dielektrikum: 100 V AC RMS 60 Hz
- Kontaktwiderstand: < 20 mΩ
- Strombelastbarkeit: 1.5A @ 20°C
- EMV-EN 50082-1; EN 55022


Mechanische Eigenschaften:

- Lebensdauer: > 750 Steckzyklen
- Temperaturbereich: -40°C ~ +66°C
- Kontaktbeschichtung: 50μ" vergoldet im Kontaktbereich

Verpackung:

- Einzeln in Polybeutel, inklusive Montageanleitung
- Mitgeliefertes Zubehör: Staubkappe, Kupferfolie, Kabelbinder

RoHS
konform

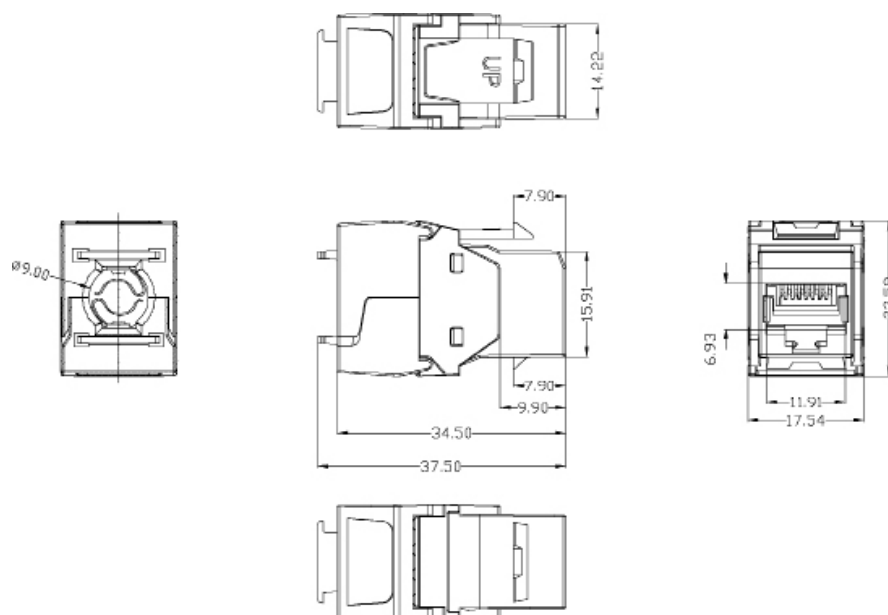

Created MN	Date 29.10.09	Cat.6a 500 MHz Modul 10GBit Keystone Jack E-20070	File: E-20070_DE
Last rev. MN	Date 10.01.11		

