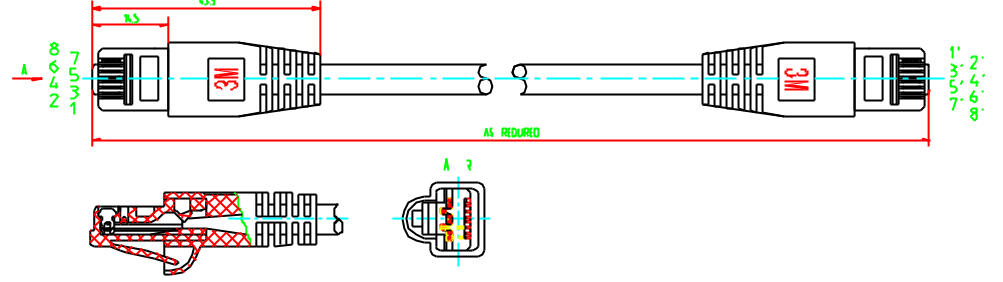



Product Specification

Product	CAT.6 SSTP 27AWG PATCH CORD		
K5510/11/12/13/14/15		Date	2004-2-3
Configuration			

1.Sketch	Unit (mm)				
(1)	Connector	RJ45 Shielded Connector with 3-50µ Gold Plate			
(2)	Plug-Body	PVC Molded With Strain Relief (Full-Length & with a Cap)			
(3)	Cable	CAT6 SSTP 27AWG stranded × 4pairs, Halogen free			

2.Pinout	B:For 568B to 568B				
(100% tested)	Pair 1	4	Blue	4	
		5	White-Blue	5	
	Pair 2	1	White-Orange	1	
		2	Orange	2	
	Pair 3	3	White-Green	3	
		6	Green	6	
	Pair 4	7	White-Brown	7	
		8	Brown	8	

3.Packing	Unit mm		L Length	L < 10ft L < 3m	10ft < L < 10ft 3m < L < 10m	10ft < L 10m < L
			(A) Cable Width	130	140	160
			(B × C) PE bag size	160 × 200	170 × 210	220 × 260

Electric Characters

Impedance	Nom.100 Ohm ± 15%											
Frequency MHz	1	4	8	10	16	20	25	31.25	62.5	100	200	250
NEXT dB	65	63.04	58.16	56.58	53.23	51.63	50.03	48.42	43.38	39.93	34.78	33.09
Returnloss dB	19	19	19	19	17.98	17.49	17.01	16.53	14.04	12	8.98	7.99

Printing:

CAT.6 SSTP 4x2xAWG27/7 PIMF ISO/IEC11801 & EN50173 TIA/EIA 568 B.2-1 HALOGEN FREE ***GIGABIT***