


LTR	REV.	DESCRIPTION	DATE

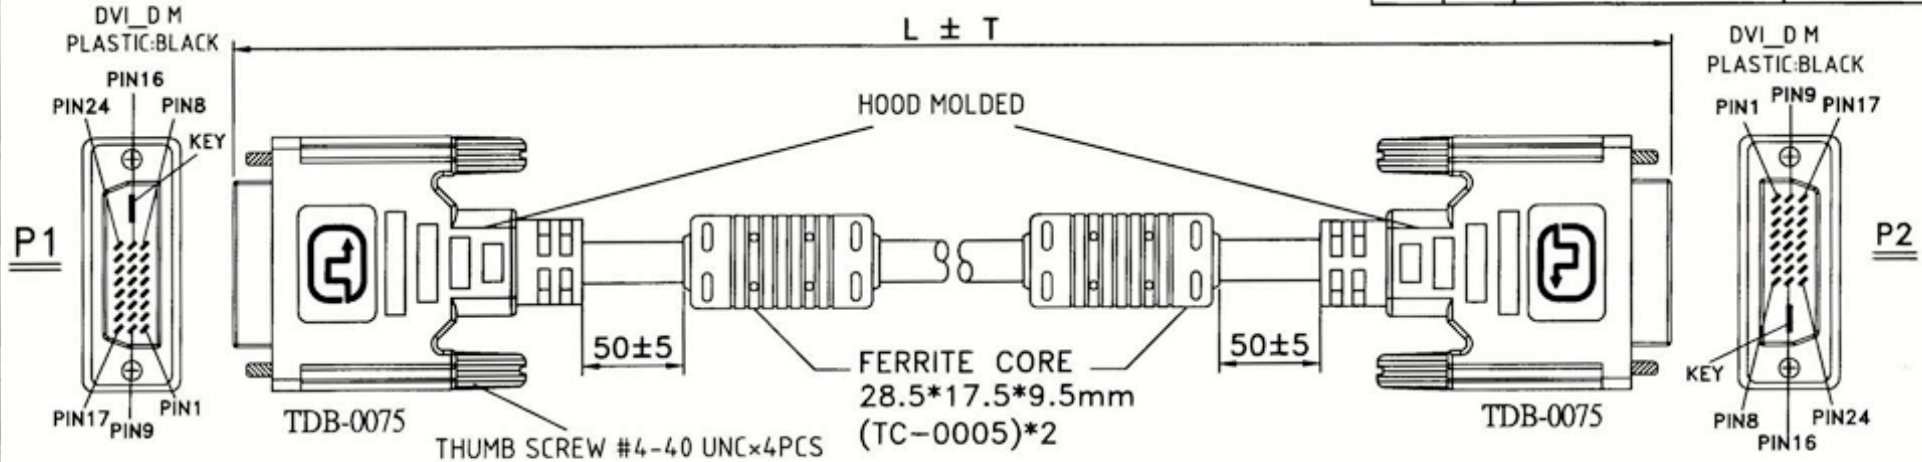

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

REMARK:

- CABLE:[30AWG(7/0.102)×1P+DRAIN WIRE+AL/MY+MY]×7C+30AWG(7/0.102)T.C×1P+30AWG(7/0.102)×3C +AL/MYLAR+(24/5/0.12) BRAID]+JACKET:PVC OD: 8.6±0.2mm UL20276 APPROVED. COLOR: BLACK
- CONNECTOR:
P1&P2:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK
- TEST REQUEST:
(1) 100% SHORT OPEN & MIS WIRE TEST.
(2) CONTACT RESISTANCE 3 OHMS MAX.
(3) INSULATION RESISTANCE 20M OHMS MIN.
(4) HI-POT VOLTAGE: 300V DC.
- PACKING:EACH PC / e'quip ZIP BAG + BAR CODE LABEL

200-0181-4	10000	50	250 x 335mm
200-0181-3	5000	50	200 x 330mm
200-0181-2	3000	30	200 x 330mm
200-0181-1	1800	30	175 x 275mm
DWG	L (mm)	T (mm)	ZIP BAG SIZE

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

www.equip-info.net

Title		DVI_D - DVI_D DUAL LINK CABLE		
Draw		Customer P/N		
AMY 02/12/04				
Check	App'd	Customer		
Engr	Scale	NONE	Units	m/m
Dwg No.		200-0181	REF: I	Sheet 1/1