



PDU20BHVIEC12R/PDU20BHVIEC12Ra  
 PDU10BVHVIEC16F/PDU10BVHVIEC20F  
 PDU20BVHVIEC24F/PDU20BVHVIEC32F

## ENTRY-LEVEL POWER DISTRIBUTION

### Provides reliable power distribution for connected equipment

Ideal for server room and data center applications, the Basic PDU Series is a power distribution device that delivers electricity from a single source to multiple devices. The products feature overload protection, external site ground pin, industrial-grade metal housing, adjustable mounting brackets, long input power cord, and cord retention tray.

#### APPLICATION


- Office
- Server room
- Factory
- Surveillance systems
- Networking devices
- Satellite devices
- Workstations
- Back office
- Data center
- Security systems
- Telecom devices
- NAS/Storage devices
- Multimedia devices

#### SERIES FEATURES

- Flexibility in Power Distribution
- Cord Retention Tray
- Industrial-grade Metal Housing
- Adjustable Mounting Brackets

#### PRODUCT CALLOUTS

1. AC Inlet
2. AC Outlets
3. Output Circuit Breaker
4. Ground Stud
5. Cord Retention Tray Screw Holes

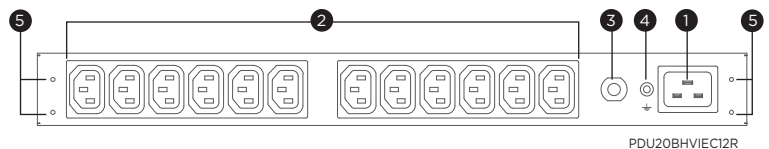

PDU20BHVIEC12R

#### TECHNICAL SPECIFICATIONS

Model Name	PDU20BHVIEC12R	PDU20BHVIEC12Ra	PDU10BVHVIEC16F	PDU10BVHVIEC20F	PDU20BVHVIEC24F	PDU20BVHVIEC32F
<b>Input</b>						
Nominal Input Voltage (Vac)	200 - 240	200 - 240	200 - 240	200 - 240	200 - 240	200 - 240
Input Frequency (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Maximum Input Current (A)	16	16	10	10	16	16
Input Connector Type	IEC C20 x 1	IEC C20 x 1	IEC C14 x 1	IEC C14 x 1	IEC C20 x 1	IEC C20 x 1
Power Cord Length (m.)	3.05	3.05	3.05	3.05	3.05	3.05
<b>Output</b>						
Over Current Protection (Each Bank) (A)	16	16	10	10	16	16
Outlet(s) - Total	12	12	16	20	24	32
Outlet(s) - Front	16	20	24	32	12	12
Outlet Type	IEC C13 x 12	IEC C19 x 2, IEC C13 x 10	IEC C13 x 16	IEC C19 x 4, IEC C13 x 16	IEC C19 x 4, IEC C13 x 20	IEC C19 x 8, IEC C13 x 4
<b>Physical</b>						
Installed Rack Height (U)	1	1	0	0	0	0
Cord Retention Tray	Yes	Yes	Yes	Yes	Yes	Yes
<b>Physical Size</b>						
Dimensions (WxHxD) (mm.)	445 x 44.5 x 38.1	445 x 44.5 x 38.1	44.5 x 609.6 x 38.1	44.5 x 914.4 x 38.1	44.5 x 1219.2 x 38.1	44.5 x 1524.0 x 38.1
Weight (kg.)	0.9	0.9	1.4	2	2.7	3.4
<b>Environmental</b>						
Operating Temperature (°C)	0 - 35	0 - 35	0 - 35	0 - 35	0 - 35	0 - 35
Operating Relative Humidity (Non-condensing) (%)	0 - 95	0 - 95	0 - 95	0 - 95	0 - 95	0 - 95
<b>Certifications</b>						
Certifications	CE, UL60950	CE, UL60950	CE, UL60950	CE, UL60950	CE, UL60950	CE, UL60950
RoHS	Yes	Yes	Yes	Yes	Yes	Yes

#All specifications are subject to change without notice.

