
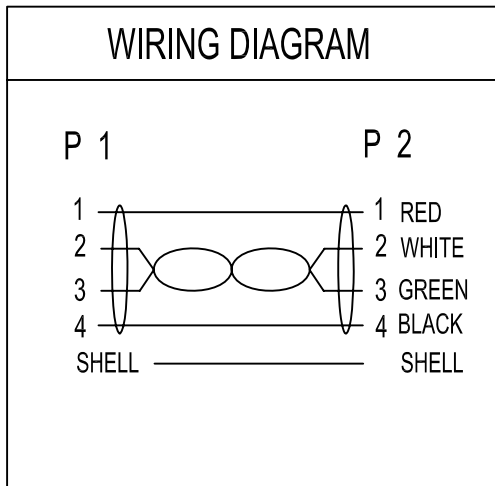


REVISION			
REV	DATE	DESCRIPTION	APPRO.BY

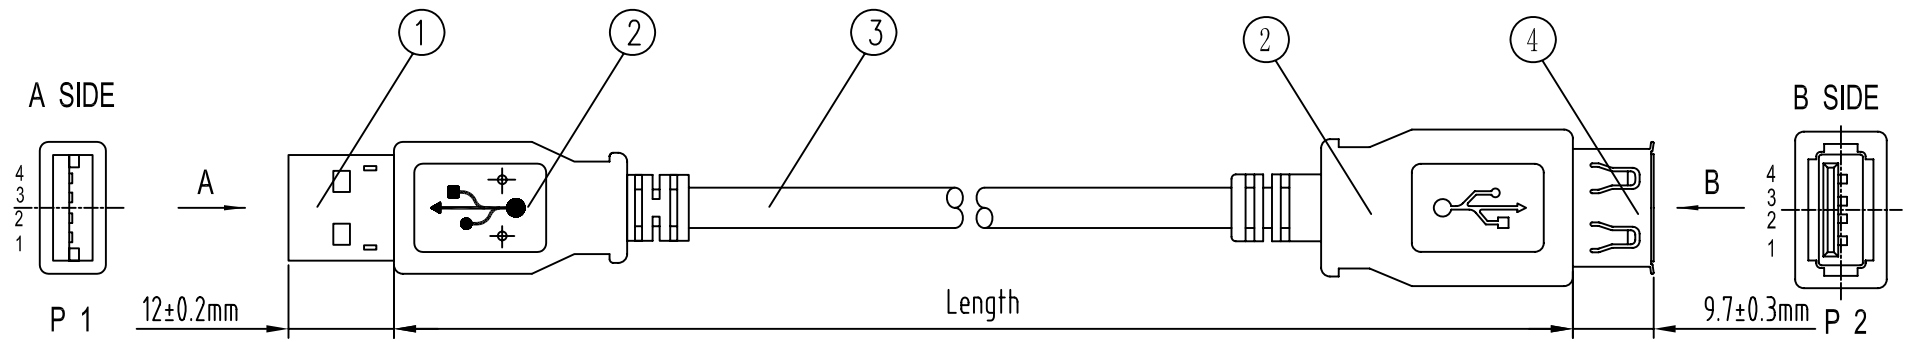

GREY	
EFB NO:	Length
K5248.1,5	1500m±20mm
K5248.1,8	1800m±30mm
K5248.3	3000m±50mm
K5248.5	5000m±100mm

NOTE:

- 1.PRINTING:AWM 80°C 30V VW-1 28AWGx1P 24AWGx2C USB2.0 HIGHSPEED CABLE
- 2.ROHS COMPLIANT

4	CONNECTOR	USB A TYPE FEMALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1
3	CABLE	28AWG TXR*1P+24AWG TXR*2C+AL+B (COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.1mm	1
2	OVERMOLD	PVC COLOR:GREY	2
1	CONNECTOR	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K5248.X	CUSTOMER	EFB	
DRAWING			TITLE	USB CABLE	
UNIT	mm	SCALE	1:1	REV	
DRAWN BY		CHECK BY	APPRO BY	DATE	
				2009-03-24	