

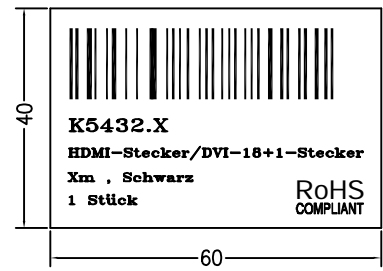
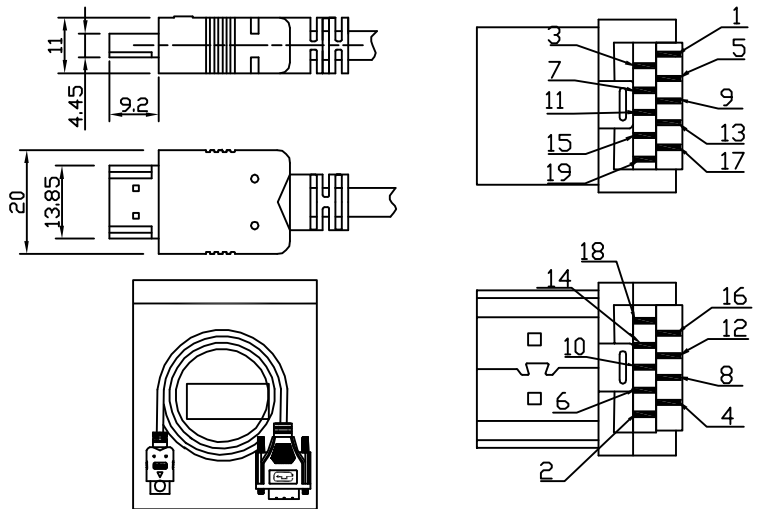


CUSTOMER NO:	REMARK
K5432.X	E.F.B

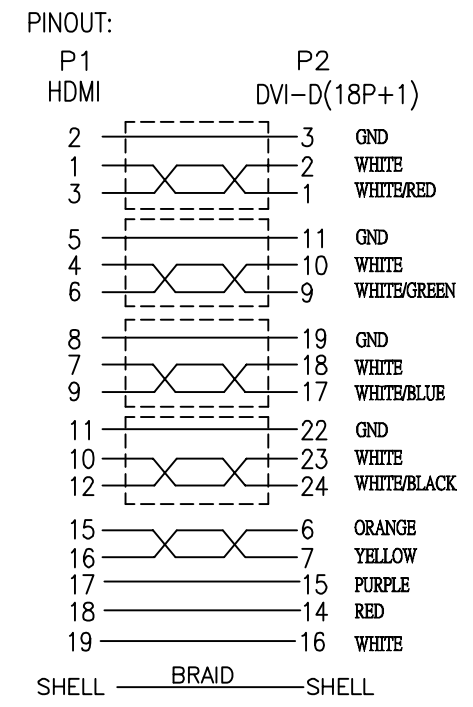

EFB ITEM No.	LENGTH
K5432.2	2M±20
K5432.3	3M±30
K5432.5	5M±50

PLUG PRINT
3:1

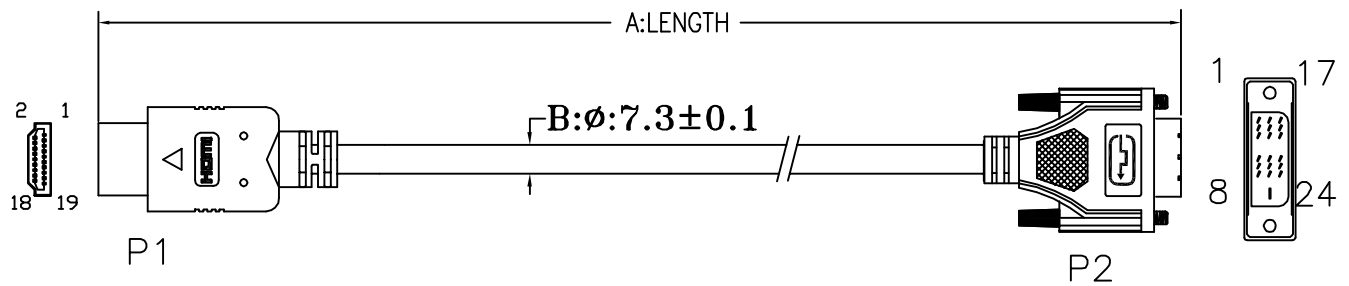

- NOTES:
- 1) PRIMARY DIM: A
 - 2) INSULATION RESISTANCE:10M ohm (MIN) 300V/DC
 - 3) CONTACT RESISTANCE:5 ohm (MAX)
 - 4) P1 DIE NO:OD15Z01
 - 5) PLUG AND SCREW PLATED GOLD FLASH
 - 6) RoHS COMPLIANT

4	OUTER JACKET PVC 60Pa BLACK(1101)(RoHS)
3	HDMI A TYPE PLUG SOLDER TYPE TERMINAL & SHELL GOLD FLASH W/O METAL
2	DVI-18P+1 BLACK SOLDER TYPE TERMINAL & SHELL GOLD FLASH W/METAL HOOD OD:8.0MM (RoHS)
1	UL20276 (28#1Pair+Aluminum foil+Drain)*4+28#1Pair+28#3C+Aluminum foil+Braid+Drain OD:7.3MM BLACK(1101) XXXXMM (RoHS)

DRAWING APPROVED _____ DATE: _____		SAMPLE APPROVED PER DRAWING SPECIFICATIONS _____ DATE: _____	
PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF EFB.			
<input type="checkbox"/> 0 <input type="checkbox"/> S	DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .XX± .XX± .XXX± .XXX± REV. A CUS.REV	TITLE HDMI CABLE CUS. P/N 2162-XXXX DRAW NO.	 ENC. DATE CHECKED DATE APPROVED DATE